

Vibrant color printing for midsize workgroups

Lexmark CS748de color laser printer delivers high-quality color printing. Easy-to-use features and solutions increase efficiency. Eco-friendly features, like automatic two-sided printing, make responsible printing easy.



Color



4.3-in. Touch Screen



Solutions



Up to 35 ppm



Duplex



Network



Eco-Mode



Security



Robust high-quality color

Rely on the Lexmark CS748de color laser printer for the high-quality color printing essential to business.

- Match corporate colors with Lexmark Named Color Replacement and PANTONE® calibration.
- The high-speed processor and Gigabit Ethernet networking mean fast data transfer and fast processing, even on complex color documents.
- Print quickly at speeds up to 35 ppm and a time to first page as fast as 9 seconds in both black and color.
- Lexmark high-yield cartridges let you print up to 12,000 pages per cartridge in black and 10,000 pages per cartridge in color.¹

Performance and productivity

The combination of easy-to-use features and reliable performance means business processes are intuitive and you are productive.


- The easy-to-use 4.3-inch color touch screen provides audible feedback and tablet-like navigation.
- Expand input capacity with optional drawers that boost total input capacity up to 4,300 sheets.
- Create custom messages to provide helpful information such as helpdesk telephone numbers and company communications.
- Instead of installing individual drivers for each printer model, the Lexmark Universal Print Driver provides a standardized, one-driver solution.

Business solutions


The Lexmark Embedded Solutions Framework (eSF) helps expand functionality, move information more efficiently throughout your business, lower costs and analyze usage patterns.

- Quickly and efficiently access eSF solutions directly from the 4.3-inch color touch screen.
- The optional hard disk provides the ability to store files on the device and run additional solutions with ease.
- Pre-loaded solutions mean you can be productive and save time, money and paper - right out of the box.
- Additional solutions are available for greater savings and productivity.

Lexmark CS748de Color laser printer Product specifications

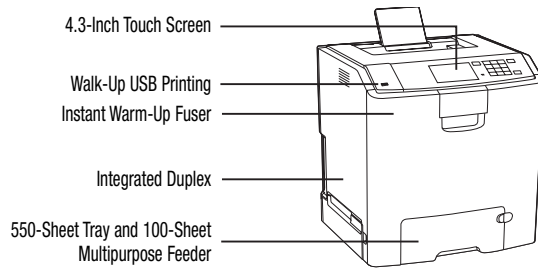

Standard
 Optional

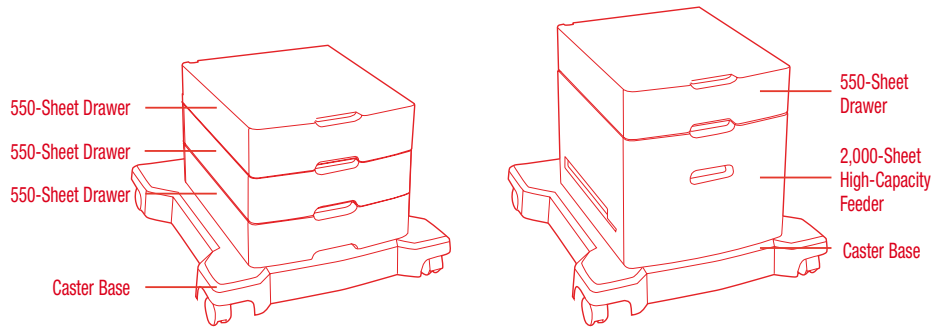

Product specifications

Lexmark CS748de Color laser printer

Printing	
Display	Lexmark e-Task 4.3-inch (10.9 cm) color touch screen with audible feedback
Print Speed: Up to	Black: 35 ppm / Color: 35 ppm
Time to First Page: As fast as	Black: 9 seconds / Color: 9 seconds
Print Resolution, Color	1200 x 1200 dpi, 4800 Color Quality (2400 x 600 dpi)
Processor	800 MHz
Memory	Standard: 512 MB / Maximum: 1536 MB
Hard Disk	Option available
Recommended Monthly Page Volume ²	2500 - 10000 pages
Maximum Monthly Duty Cycle: Up to ³	100000 pages per month
Supplies	
Supplies Yield	10,000 ¹ -page color High Yield Toner Cartridges (CMY), 12,000 ¹ -page Black High Yield Toner Cartridge
Cartridge(s) Shipping with Product	10,000 ¹ -page color (CMY) High Yield Return Program Toner Cartridges, 12,000 ¹ -page Black High Yield Return Program Toner Cartridge
Paper Handling	
Paper Handling Standard	300-Sheet Output Bin, Integrated Duplex, 100-Sheet Multipurpose Feeder, 550-Sheet Input Tray
Paper Handling Optional	550-Sheet Drawer, 2,000-Sheet High-Capacity Feeder, 550-Sheet Specialty Media Drawer
Paper Input Capacity: Up to	Standard: 650 pages 20 lb or 75 gsm bond / Maximum: 4300pages 20 lb or 75 gsm bond (Add 3 of 550-Sheet Drawers and 2,000 Sheet High-Capacity Feeder with caster base)
Paper Output Capacity: Up to	Standard: 300 pages 20 lb or 75 gsm bond / Maximum: 300 pages 20 lb or 75 gsm bond
Media Types Supported	Card Stock, Envelopes, Paper Labels, Plain Paper, Transparencies, Vinyl Labels, Refer to the Card Stock & Label Guide
Media Sizes Supported	10 Envelope, 7 3/4 Envelope, 9 Envelope, A4, A5, B5 Envelope, C5 Envelope, DL Envelope, B5, Executive, Folio, JIS-B5, Legal, Letter, Statement, Universal, Oficio, A6
General	
Standard Ports	USB 2.0 Specification Hi-Speed Certified (Type B), Front USB 2.0 Specification Hi-Speed Certified Port (Type A), Rear USB 2.0 Specification Hi-Speed Certified Port (Type A), Ethernet 10/100/1000 BaseTX (RJ-45)
Optional Network Ports	Internal MarkNet™ N8120 Gigabit Ethernet, Internal MarkNet™ N8250 802.11b/g/n Wireless
Optional Local Ports	Internal RS-232C serial, Internal 1284-B Bidirectional Parallel
Print Noise Level, Operating	55 dBA
Energy Star	Yes
Specified Operating Environment	Temperature: 16 to 32°C (60 to 90°F), Humidity: 8 to 80% Relative Humidity, Altitude: 0 - 3048 Meters (10,000 Feet)
Size (in. - H x W x D) / Weight (lb.)	17.9 x 17.1 x 15.7 in. / 56.4 lb.

¹ Based on approximately 5% print coverage. Actual yields may vary based on factors such as page coverage, image type, job size, print/copy/fax modes, and duplexing.

² "Recommended Monthly Page Volume" is a range of pages that helps customers evaluate Lexmark's product offerings based on the average number of pages customers plan to print on the device each month. Lexmark recommends that the number of pages per month be within the stated range for optimum device performance, based on factors including: supplies replacement intervals, paper loading intervals, speed, and typical customer usage.

³ "Maximum Monthly Duty Cycle" is defined as the maximum number of pages a device could deliver in a month using a multishift operation. This metric provides a comparison of robustness in relation to other Lexmark printers and MFPs.

